



WWW.SOULLEDLIGHTING.COM

Project/Projet:
Contact:

LED Ribbon / Ruban DEL



Standard



IP Grade Available / Disponible




Dimensions: SL3528-30-2.4

C2: 24 VDC=200 mm




Dimensions: SL3528-60-4.8

C2: 24 VDC=100mm

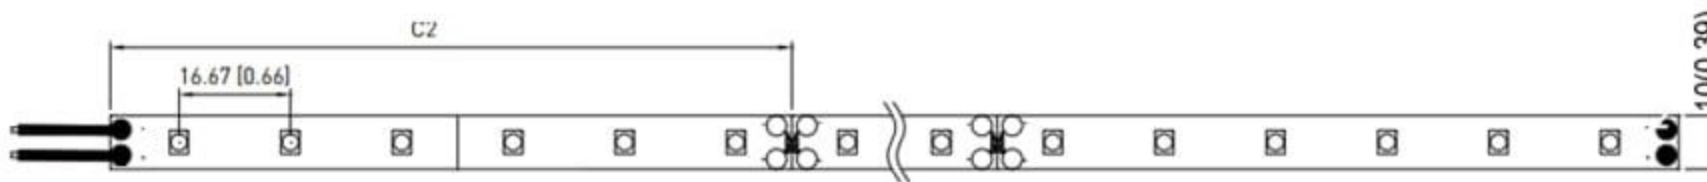


Dimensions: SL3528-120-9.6

C2: 24 VDC=50mm

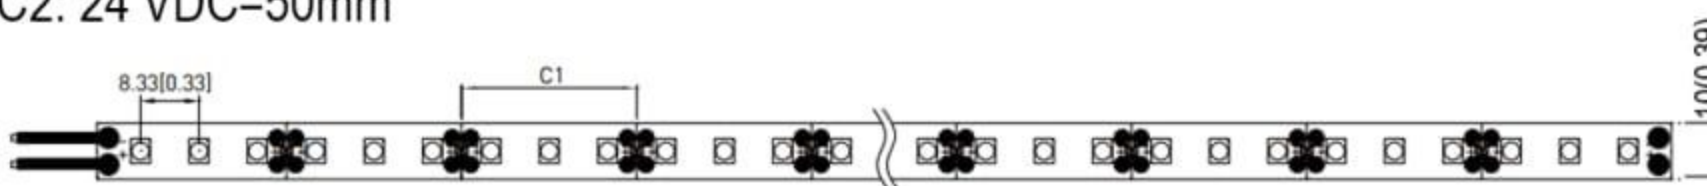


Dimensions: SL2835-120-14.4

C2: 24VDC= 50mm

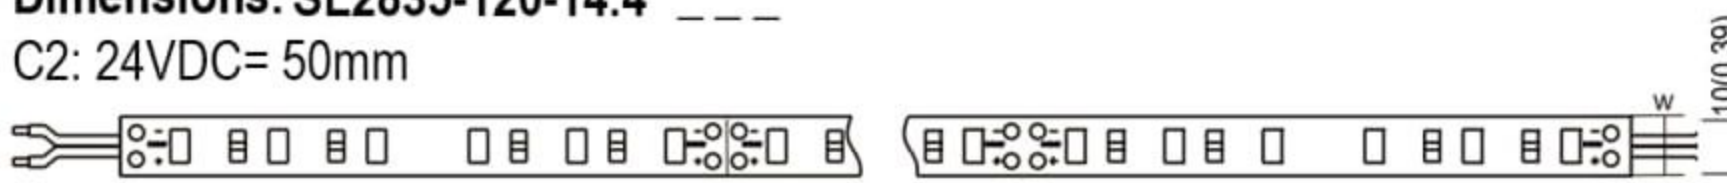

Available temperature /
Température disponible:

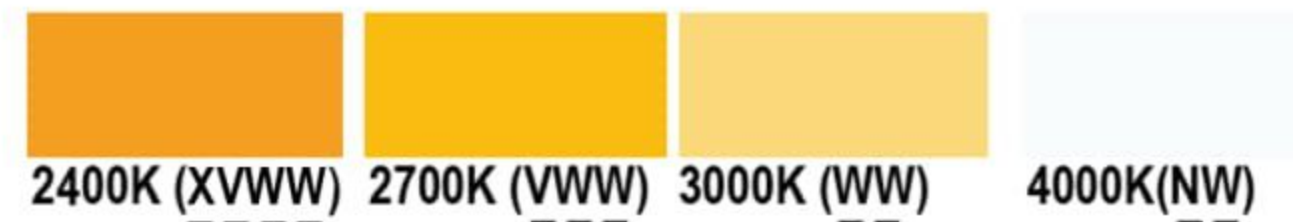

*C2 Cuttable / Découpable

Code	Voltage	Wattage / m	Lumen / m	Diode	Diode / m	Section L	Dimension
SL3528-30-2.4	24 VDC	2.4w	122-203lm	SMD 3528	30pcs	24V=200mm	10mm
SL3528-60-4.8		4.8w	243-405lm	SMD 3528	60pcs	24V=100mm	
SL3528-120-9.6		9.6w	486-810lm	SMD 3528	120pcs	24V=50mm	
SL2835-120-14.4		14.4w/30mA	1200-1464lm	SMD 2835	120pcs	24V=50mm	